


Řetězová kola s tvrzeným ozubením s hotovým otvorem, drážkou a šroubem

Typ 10 B-1 5/8" x 3/8"

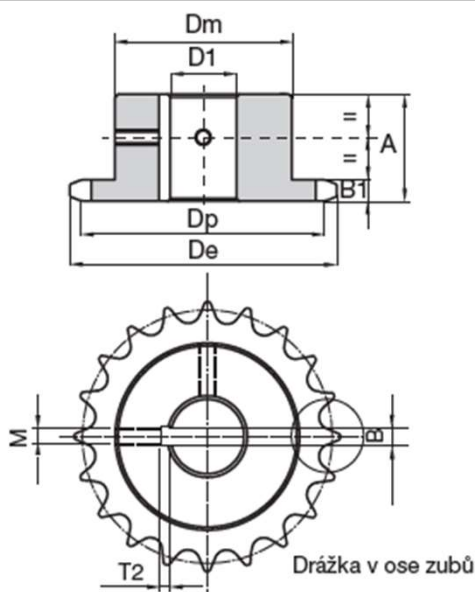

Indukčně tvrzené ozubení HRC 45 - 53

5/8" x 3/8" SIMPLEX									
Počet zubů Z	Rozměry (mm)								
	d_e	d_p	d_m	A	D₁ H7	B₁	B H9	T₂	M
23	123,40	116,58	80	30	20	9,1	6	2,8	M5
	123,40	116,58	80	30	22	9,1	6	2,8	M5
	123,40	116,58	80	30	24	9,1	8	3,3	M6
	123,40	116,58	80	30	25	9,1	8	3,3	M6
	123,40	116,58	80	30	28	9,1	8	3,3	M6
	123,40	116,58	80	30	30	9,1	8	3,3	M6
	123,40	116,58	80	30	32	9,1	10	3,3	M8
	123,40	116,58	80	30	35	9,1	10	3,3	M8
	123,40	116,58	80	30	38	9,1	10	3,3	M8
	123,40	116,58	80	30	40	9,1	12	3,3	M10
24	128,50	121,62	80	30	20	9,1	6	2,8	M5
	128,50	121,62	80	30	22	9,1	6	2,8	M5
	128,50	121,62	80	30	24	9,1	8	3,3	M6
	128,50	121,62	80	30	25	9,1	8	3,3	M6
	128,50	121,62	80	30	28	9,1	8	3,3	M6
	128,50	121,62	80	30	30	9,1	8	3,3	M6
	128,50	121,62	80	30	32	9,1	10	3,3	M8
	128,50	121,62	80	30	35	9,1	10	3,3	M8
	128,50	121,62	80	30	38	9,1	10	3,3	M8
	128,50	121,62	80	30	40	9,1	12	3,3	M10
128,50	121,62	80	30	42	9,1	12	3,3	M10	