


Řetězová kola s tvrzeným ozubením s hotovým otvorem, drážkou a šroubem

Typ 12 B-1 3/4" x 7/16"

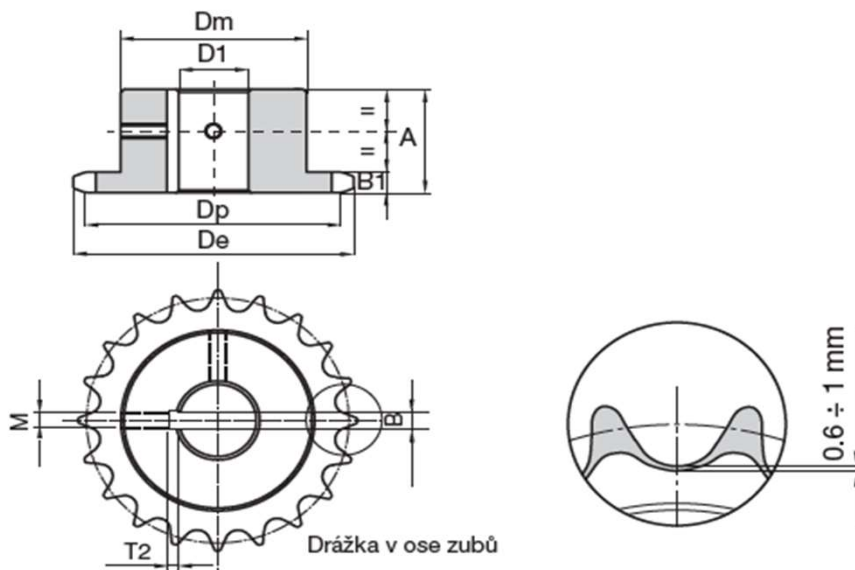

Indukčně tvrzené ozubení HRC 45 - 53

3/4" x 7/16" SIMPLEX									
Počet zubů Z	Rozměry (mm)								
	d_e	d_p	d_m	A	D₁ H7	B₁	B H9	T₂	M
17	111,20	103,67	80	35	22	11,1	6	2,8	M5
	111,20	103,67	80	35	25	11,1	8	3,3	M6
	111,20	103,67	80	35	28	11,1	8	3,3	M6
	111,20	103,67	80	35	30	11,1	8	3,3	M6
	111,20	103,67	80	35	32	11,1	10	3,3	M8
	111,20	103,67	80	35	35	11,1	10	3,3	M8
	111,20	103,67	80	35	38	11,1	10	3,3	M8
	111,20	103,67	80	35	40	11,1	12	3,6	M10
18	118,00	109,71	80	35	22	11,1	6	2,8	M5
	118,00	109,71	80	35	25	11,1	8	3,3	M6
	118,00	109,71	80	35	28	11,1	8	3,3	M6
	118,00	109,71	80	35	30	11,1	8	3,3	M6
	118,00	109,71	80	35	32	11,1	10	3,3	M8
	118,00	109,71	80	35	35	11,1	10	3,3	M8
	118,00	109,71	80	35	38	11,1	10	3,3	M8
	118,00	109,71	80	35	40	11,1	12	3,3	M10
19	123,30	115,75	80	35	25	11,1	8	3,3	M6
	123,30	115,75	80	35	28	11,1	8	3,3	M6
	123,30	115,75	80	35	30	11,1	8	3,3	M6
	123,30	115,75	80	35	32	11,1	10	3,3	M8
	123,30	115,75	80	35	35	11,1	10	3,3	M8
	123,30	115,75	80	35	38	11,1	10	3,3	M8
	123,30	115,75	80	35	40	11,1	12	3,3	M10
	123,30	115,75	80	35	42	11,1	12	3,3	M10
	123,30	115,75	80	35	45	11,1	14	3,8	M12