


Řetězová kola s tvrzeným ozubením s hotovým otvorem, drážkou a šroubem

Typ 12 B-1 3/4" x 7/16"

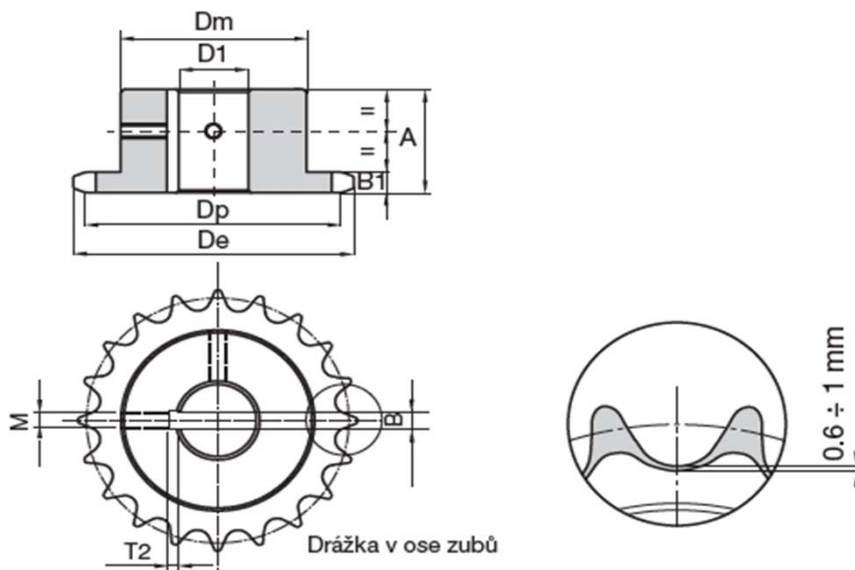

Indukčně tvrzené ozubení HRC 45 - 53

3/4" x 7/16" SIMPLEX

| Počet zubů Z | Rozměry (mm) | | | | | | | | |
|------------------------|----------------------|----------------------|----------------------|-----------|-------------------------|----------------------|-------------|----------------------|------------|
| | d_e | d_p | d_m | A | D₁ H7 | B₁ | B H9 | T₂ | M |
| 25 | 159,50 | 152,00 | 90 | 40 | 28 | 11,1 | 8 | 3,3 | M6 |
| | 159,50 | 152,00 | 90 | 40 | 30 | 11,1 | 8 | 3,3 | M6 |
| | 159,50 | 152,00 | 90 | 40 | 32 | 11,1 | 10 | 3,3 | M8 |
| | 159,50 | 152,00 | 90 | 40 | 35 | 11,1 | 10 | 3,3 | M8 |
| | 159,50 | 152,00 | 90 | 40 | 38 | 11,1 | 10 | 3,3 | M8 |
| | 159,50 | 152,00 | 90 | 40 | 40 | 11,1 | 12 | 3,3 | M10 |
| | 159,50 | 152,00 | 90 | 40 | 42 | 11,1 | 12 | 3,3 | M10 |
| | 159,50 | 152,00 | 90 | 40 | 45 | 11,1 | 14 | 3,8 | M12 |
| | 159,50 | 152,00 | 90 | 40 | 48 | 11,1 | 14 | 3,8 | M12 |
| 159,50 | 152,00 | 90 | 40 | 50 | 11,1 | 14 | 3,8 | M12 | |