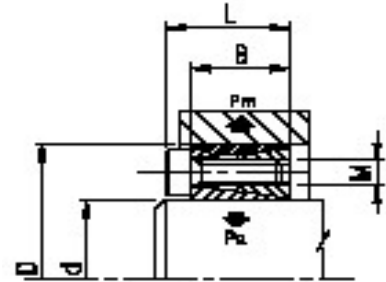



Upínací pouzdra CAL

Typ SIT-LOCK 12


CAL 12 / SIT-LOCK 12

Označení	Rozměry		Kroučící moment	Axiální síla	Tlak na hřídel	Tlak na náboj	Upínací šrouby		
	d x D (mm)	B (mm)					L (mm)	M _t (Nm)	P _{ax} (kN)
18 x 40	18	24	20,6	23	243	112	4	M 6	17
19 x 41	18	24	21,5	33	231	108	4	M 6	17
20 x 42	18	24	25,5	25	221	108	4	M 6	17
22 x 44	18	24	28,4	26	206	103	4	M 6	17
24 x 46	18	24	32,3	27	221	123	6	M 6	17
25 x 47	18	24	34,3	27	209	112	6	M 6	17
28 x 50	18	24	38,2	27	196	108	6	M 6	17
30 x 52	18	24	45,1	30	178	103	6	M 6	17
32 x 54	18	24	52,0	32	166	92	6	M 6	17
35 x 57	21,5	28	63,7	36	205	127	6	M 6	17
36 x 58	21,5	28	65,0	36	205	127	8	M 6	17
38 x 60	21,5	28	66,9	37	195	117	8	M 6	17
40 x 62	21,5	28	79,4	40	185	112	8	M 6	17
42 x 70	28	36	150	68	190	115	8	M 8	40
45 x 73	28	36	154	68	190	115	8	M 8	40
48 x 76	28	36	168	68	180	120	8	M 8	40
50 x 78	28	36	170,7	68	172	108	8	M 8	40
55 x 83	28	36	216	79	160	105	8	M 8	40
60 x 88	28	36	235	78	150	100	8	M 8	40
70 x 105	35	45	503	144	200	130	8	M 10	81
75 x 110	35	45	540	144	200	130	8	M 10	81
80 x 115	35	45	580	144	170	120	9	M 10	81
85 x 120	35	45	630	148	160	120	10	M 10	81
90 x 125	35	45	700	156	160	120	10	M 10	81
95 x 130	35	45	900	198	155	120	10	M 10	81
100 x 138	35	45	990	198	150	110	10	M 10	81