


Upínací pouzdra CAL

Typ SIT-LOCK 10

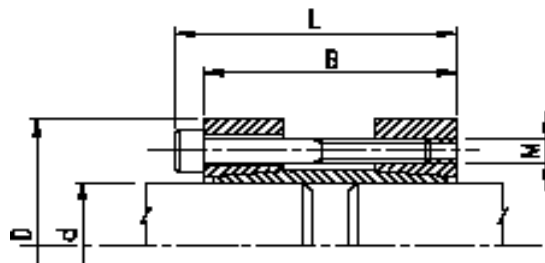

CAL- P M								
Označení	Rozměry		Krouticí moment	Axiální síla	Tlak na hřídel	Upínací šrouby		
d x D (mm)	B (mm)	L (mm)	M _t (Nm)	P _{ax} (kN)	P _w (MPa)	Počet (ks)	Typ DIN 912	M _S (Nm)
15 x 45	50	56	15	17,3	150	4	M 6	18
16 x 45	50	56	16	17,3	140	4	M 6	18
17 x 45	50	56	17	17,3	130	4	M 6	18
18 x 50	50	56	18	17,3	120	4	M 6	18
19 x 50	50	56	19	17,3	120	4	M 6	18
20 x 50	50	56	20	17,3	110	4	M 6	18
22 x 55	60	66	33	26,0	110	6	M 6	18
24 x 55	60	66	36	26,0	110	6	M 6	18
25 x 55	60	66	37	26,0	100	6	M 6	18
28 x 60	60	66	42	26,0	100	6	M 6	18
30 x 60	60	66	45	26,0	100	6	M 6	18
32 x 75	75	83	58	31,8	90	4	M 8	40
35 x 75	75	83	64	31,8	80	4	M 8	40
38 x 75	75	83	69	31,8	70	4	M 8	40
40 x 75	75	83	73	31,8	70	4	M 8	40
42 x 85	85	93	113	47,7	80	6	M 8	40
45 x 85	85	93	123	47,7	80	6	M 8	40
48 x 90	85	93	131	47,7	70	6	M 8	40
50 x 90	85	93	137	47,7	120	6	M 8	40
55 x 95	85	93	200	63,6	60	8	M 8	40
60 x 100	85	93	220	63,6	50	8	M 8	40
65 x 105	85	93	233	63,6	50	8	M 8	40
70 x 115	100	110	330	80,0	65	6	M 10	84
80 x 125	100	110	500	110,0	65	8	M 10	84