


## Upínací pouzdra CAL

### Typ SIT-LOCK 13

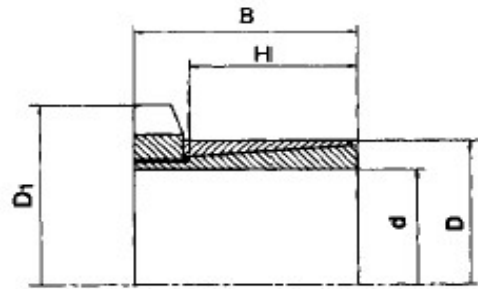

CAL 13S/ SIT-LOCK 13

Označení	Rozměry			Kroucí moment	Axiální síla	Tlak na hřídel	Tlak na náboj	Upínací matice	
	d x D (mm)	D <sub>1</sub> (mm)	H (mm)					B (mm)	M <sub>t</sub> (Nm)
<b>14 x 25</b>	32	20	30	64	9	85	45	KM 4	95
<b>15 x 25</b>	32	20	30	70	9	80	45	KM 4	95
<b>16 x 25</b>	32	20	30	73	9	75	45	KM 4	95
<b>17 x 25</b>	32	20	32	80	9	70	45	KM 4	160
<b>18 x 30</b>	38	20	32	83	9	65	40	KM 4	160
<b>19 x 30</b>	38	20	32	105	11	75	45	KM 5	160
<b>20 x 30</b>	38	20	32	112	11	70	45	KM 5	160
<b>22 x 35</b>	38	25	36	163	14	70	45	KM 5	220
<b>24 x 35</b>	45	25	36	178	14	65	45	KM 6	220
<b>25 x 35</b>	45	25	36	185	14	60	45	KM 6	220
<b>28 x 40</b>	52	25	36	250	17	55	40	KM 6	340
<b>30 x 40</b>	52	25	36	270	17	50	40	KM 7	340
<b>32 x 45</b>	58	30	44	350	21	60	45	KM 7	480
<b>35 x 45</b>	58	30	44	390	21	55	45	KM 8	480
<b>36 x 50</b>	65	30	44	390	21	55	45	KM 8	480
<b>38 x 50</b>	64	30	45	500	26	60	45	KM 8	680
<b>40 x 50</b>	64	30	45	520	26	55	45	KM 9	680
<b>42 x 55</b>	70	30	45	680	30	60	50	KM 9	870
<b>45 x 55</b>	70	30	46	680	30	60	50	KM10	870
<b>48 x 60</b>	75	30	46	840	35	60	50	KM11	970
<b>50 x 60</b>	75	30	46	880	35	60	50	KM11	970
<b>55 x 65</b>	80	30	46	1030	37	60	50	KM12	1100
<b>56 x 68</b>	80	30	46	1030	37	60	50	KM12	1100
<b>60 x 70</b>	85	30	52	1360	45	65	55	KM13	1300