


HŘÍDELOVÉ SPOJKY


Spojky PINFLEX

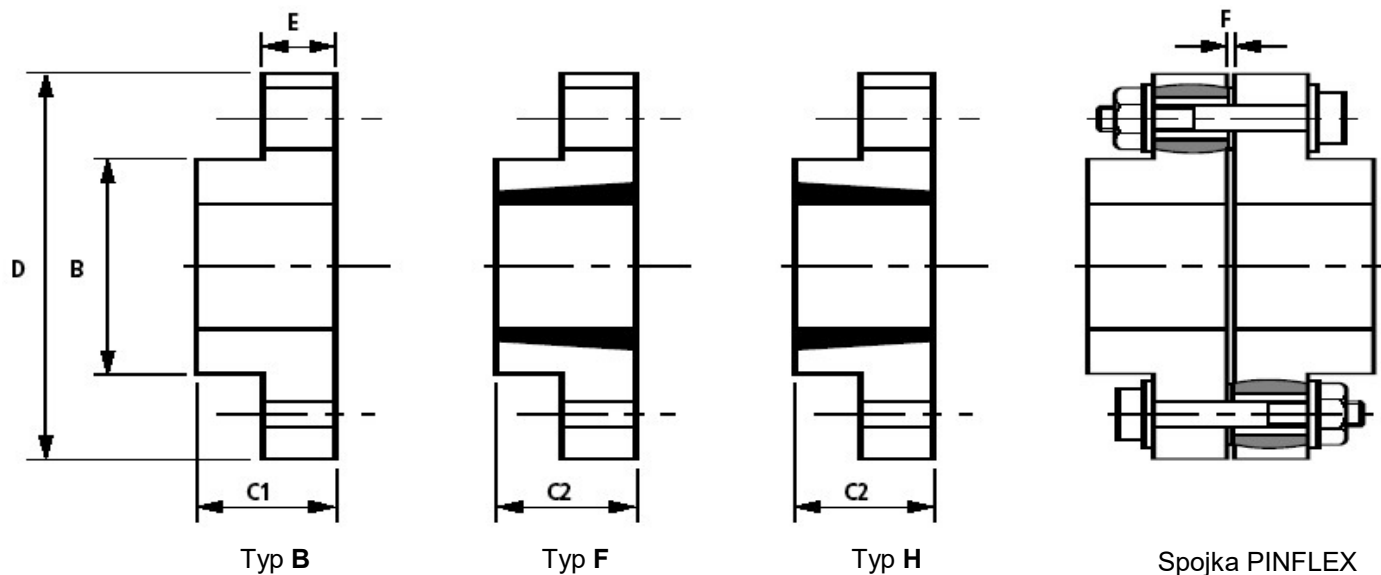

SPOJKY PINFLEX														
Označení	Výkon / 100 ot/min kW	Jmenovitý Mk Nm	Max. otáčky 1/min	Typ B		Typ F+H			Rozměry (mm)					
				Otvor		Typ pouzdra	Otvor		B	C1	C2	D	E	F
				max	min		max	min						
PF1# #3	2,03	194												
PF1# #6	4,05	387	6800	50	0	1215	32	11	70	44	40	125	20	4
PF1BB9	6,08	581												
PF1BB12	8,1	774												
PF2# #3	3,59	343												
PF2# #6	7,18	685	5900	55	0	1615	42	14	80	50	40	145	25	5
PF2BB9	10,76	1028												
PF2BB12	14,35	1370												
PF3# #3	4,24	405												
PF3# #6	8,48	810	5200	72	0	2017	50	18	100	60	47	165	25	5
PF3BB9	12,71	1214												
PF3BB12	16,96	1620												
PF4# #3	8,32	795												
PF4# #6	16,65	1590	4400	80	0	2525	60	19	113	75	65	195	35	6
PF4BB9	24,97	2384												
PF4BB12	33,29	3179												
PF5# #4	13,94	1331												
PF5# #8	27,88	2662	3600	110	0	3030	75	35	150	89	80	235	35	6
PF5# #12	41,82	3994												
PF5BB16	55,76	5325												

HŘÍDELOVÉ SPOJKY

Spojky PINFLEX

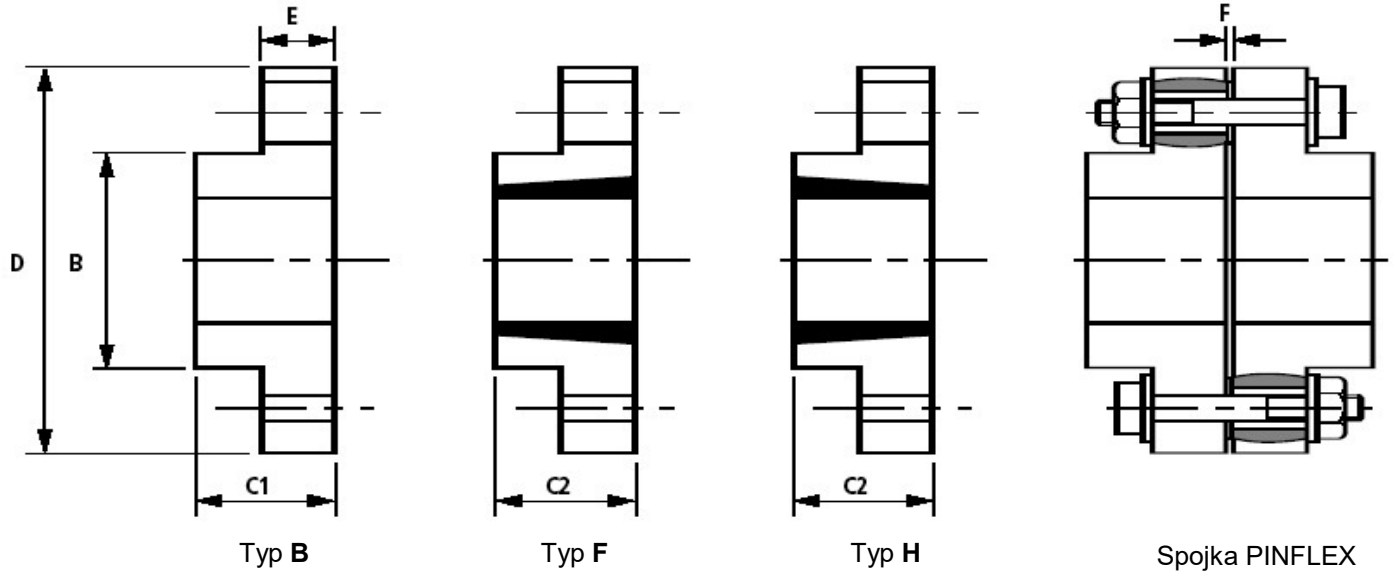

SPOJKY PINFLEX														
Označení	Výkon / 100 ot/min kW	Jmenovitý Mk Nm	Max. otáčky 1/min	Typ B		Typ F+H			Rozměry (mm)					
				Otvor		Typ pouzdra	Otvor		B	C1	C2	D	E	F
				max	min		max	min						
PF6# #3	24,70	2359												
PF6# #6	49,40	4717	2900	130	55	3535	90	35	180	110	91	290	50	7
PF6# #9	74,10	7076												
PF6BB12	98,80	9435												
PF7# #4	37,18	3550												
PF7# #8	74,35	7100	2600	150	65	4040	100	40	210	130	105	320	50	7
PF7# #12	111,53	10650												
PF7BB16	148,70	14200												
PF8# #4	64,70	6179												
PF8# #8	129,40	12357	2200	175	75	5050	125	70	245	150	130	380	60	7
PF8# #12	194,10	18536												
PF8BB16	258,80	24714												
PF9BB4	85,00	8130												
PF9BB8	170,00	16255	1700	260	75	-	-	-	355	220	-	490	60	7
PF9BB12	255,00	24385												
PF9BB16	340,00	32500												

Způsob označení spojky:

