


## Upínací pouzdra CAL

### Typ SIT-LOCK 11

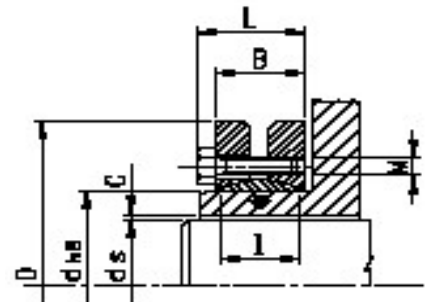

SIT-LOCK 11											
Označení	Rozměry						Krouticí moment	Axiální síla	Upínací šrouby		
d x D (mm)	d h8 (mm)	ds (mm)	D (mm)	L (mm)	B (mm)	l (mm)	M <sub>t</sub> (Nm)	P <sub>ax</sub> (kN)	Počet (ks)	Typ DIN 912	M <sub>S</sub> (Nm)
<b>24 x 50</b>	24	19	50	23	19	14	18	26	6	M 5	4
		20					21	27			
		21					25	29			
<b>30 x 60</b>	30	24	60	25	21	16	21	26	6	M 5	4
		25					34	27			
		26					38	28			
<b>36 x 72</b>	36	28	72	27	23	18	46	50	6	M 6	12
		30					59	54			
		31					63	58			
<b>44 x 80</b>	44	32	80	29	25	20	63	65	8	M 6	12
		35					78	74			
		36					86	77			
<b>50 x 90</b>	50	38	90	31	27	22	94	79	8	M 6	12
		40					110	85			
		42					130	90			
<b>55 x 100</b>	55	42	100	34	30	23	120	80	8	M 6	12
		45					150	90			
		48					190	100			
<b>62 x 110</b>	62	48	110	34	30	23	180	100	10	M 6	12
		50					220	110			
		52					240	120			
<b>68 x 115</b>	68	50	115	34	30	23	200	100	10	M 6	12
		55					250	110			
		60					310	120			
<b>80 x 145</b>	80	60	145	38	32	25	320	120	8	M 8	30
		65					390	140			
		70					460	160			
<b>100 x 170</b>	100	70	170	49,5	44	34	690	180	12	M 8	30
		75					750	220			
		80					900	240			
<b>125 x 215</b>	125	85	215	61	54	42	1100	300	12	M 10	59
		90					1300	320			
		95					1500	350			